



Mini GaN Charger 100W

with Display



100W Power, 3 Ports, and a Smart Display

Delivering up to 100W total output, this compact GaN wall charger can power a laptop, tablet, and smartphone simultaneously.

An integrated TFT display shows real-time charging data for each port, while PPS dynamically adjusts power for optimal speed and safety.

Advanced GaN technology ensures high efficiency with low heat, backed by full protection against overcurrent, overvoltage, overheating, and short circuits.

A fireproof PC housing adds extra reliability.

With interchangeable EU, UK, and US plugs, it's a powerful, travel-ready charger that fits easily into any bag.



2x USB-C
PD 3.0




USB-A
QC 3.0



TFT
Display



Multi-Plug
Included

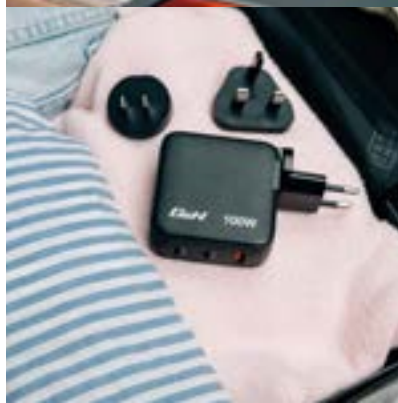

General Information			
Approx. product dimensions LxWxH	68 x 31 x 68 mm		
Product weight	245 g		
Product material	Fireproof PC		
Colour	Black		
Input Plug Formats	US (Type A) / EU (Type C) / UK (Type G)		
Supported devices	Laptop, iPhone, iPad, Smartphones, Tablet PCs, MP3/MP4 players, smartwatch, etc.		
RoHS REACH	Yes		
Certifications	CE/UKCA/FCC		
Power			
Input	100-240 V AC 50/60Hz 1.8A (Max)		
Total Output	100W Max		
Charging Mode	USB-C: PD 3.0 (PPS) USB-A: QC3.0, QC2.0		
Single Port Output			
USB-C1 Output PD 3.0 (PPS supported)	5V-11V/4.5A, 5V-21V/5A, 9V/3A, 15V/3A, 20V/5A (Max:100W)		
USB-C2 Output PD 3.0 (PPS supported)	5V-11V/4.5A, 5V-21V/5A, 9V/3A, 15V/3A, 20V/5A (Max:100W)		
USB-A Output QC 3.0	5V/3A, 9V/3A, 12V/2.5A, (Max:30W)		
Multiport Output	USB-C1 PD 3.0	USB-C2 PD 3.0	USB-A QC 3.0
USB-C1+USB-C2	65W Max	30W Max	-
USB-C1+USB-A	65W Max	-	30W Max
USB-C2+USB-A	-	15W Max share	
USB-C1+USB-C2+USB-A	65W Max	15W Max share	



US
Type A



UK
Type G



EU
Type C



Safety

Output short circuit protect	Yes
Over-voltage protection	Yes
Over-current protection	Yes
Over-temperature protection	Yes

Directives

Electromagnetic compatibility	2014/30/EC
Low voltage protection	2014/35/EC
General product safety	2001/95/EC
RoHS directive	2011/65/EC
Annex II	2015/863/EC
Test standards	EN 55032:2015+A1:2020+A1:2020 EN 55035:2017+A1:2020 EN 61000-3-2:2019+A2:2021 EN 61000-3-3:2013+A1:2019+A2:2021 EN IEC 62386-1:2020+A1:2020

Storage and Operating Conditions

Storage temperature	-25°C to +40°C
Operating temperature	0°C to +25°C
Operating Humidity	20% -80%

PN	Description	Tariff Code	Bar Code	EAN128 Code	EAN14 Code
30239	Verbatim Mini GaN Charger 100W with Display	85366990	0023942302391	(02)00023942302391(37)06(91)864 (02)00023942302391(37)24(91)864	20023942302395 50023942302396

Logistic Information

Product Dimensions: L x W x H	68 x 31 x 68 mm
Product Weight:	245 g
Units per Pack:	1
Pack Dimensions:	110 x 55 x 123 mm
Pack Weight:	371.54 g
Packs per Inner Carton:	6
Inner Carton Dimensions: L x W x H	355 x 150 x 145 mm
Inner Carton Weight:	2379 g
Packs per Outer Carton:	24
Outer Carton Dimensions: L x W x H	375 x 275 x 315 mm
Outer Carton Weight:	10088 g
Outer Cartons per Layer:	12
Layers per Pallet:	4
Units per Pallet:	1152



USB-C1 PD 3.0 (PPS) Max 100W

USB-C2 PD 3.0 (PPS) Max 100W

USB-A QC 3.0 Max 30W



Pack Contents

- Verbatim GaN Charger
- EU, US and UK plug Adapter
- Quick Start Guide



INDOOR USE ONLY.

Warranty

2 year limited warranty

For more information, please
contact your key account manager

Publication date: 09/01/2026
© 2026 Verbatim. All rights reserved.
All brand names are registered trademarks of their respective owners.
Unauthorized use strictly prohibited.
Specifications are subject to change without prior notice.

